


e l e r o

**Revio-868 –**  
**der Unterputzfunkempfänger für Antriebe**  
*Revio-868 –*  
*the built-in receiver for drives*

**meimo**  
Antriebe Steuerungen

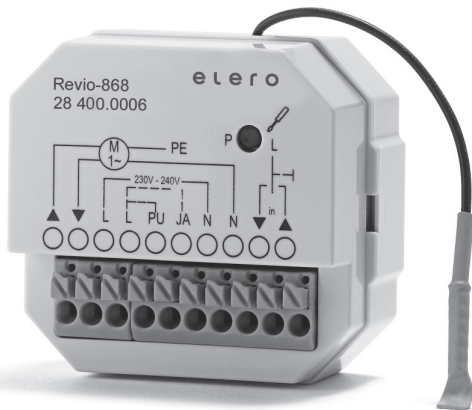

**Technische Daten**

Nennspannung:	230V AC/50 Hz
Schaltleistung:	690 W
Schutzart:	IP 20
Zulässige Umgebungstemperatur:	0°C bis +55°C
Funkfrequenz:	868 MHz-Band
Maße in mm:	L 50 x B 48 x H 22

**Technical data**

Nominal voltage:	230V AC/50 Hz
	690VA
Ingress protection:	IP 20
Permissible ambient temperature:	0°C to +55°C
Radio frequency:	868 MHz band
Dimensions in mm:	L 50 x W 48 x H 22

**Einsatzbereiche:**



**Eigenschaften:**

- Flexibler Funkempfänger für Schalter/Abzweigboxen
- Passt in Unterputzdosen Ø 60 mm
- Verschiedene Modi (RM, JA, JA-Pulse)
- Zusätzliche Bedienung über externen Taster möglich
- Volle Abwärtskompatibilität zu unidirektionalen elero-Funkprodukten
- Für den Einsatz bei Beleuchtungen ist ein Revio-868 SW zu verwenden

**Range of application:**



**Product features:**

- Flexible radio receiver for switches and junction boxes
- Fits into deep built-in socket housings, 60 mm diameter
- Different modes (RM, JA, JA-Pulse)
- Additional control possible via external push-button
- Full downwards compatibility with unidirectional radio products by elero
- For lighting use, Revio-868 SW is needed